


FDMB (Lightweight wall - Firebatt) - EI 30 S - UKCA

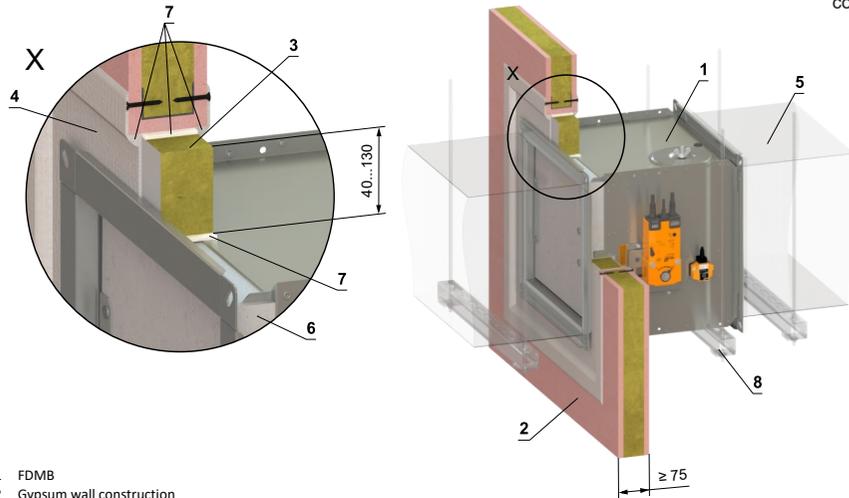


- 1 FDMB
- 2 Gypsum wall construction
- 3 Ablative Coated Batt (e.g. Firestop Board HILTI CFS-CT B 15 140/50 - min. density 140 kg/m³ + Firestop acrylic sealant HILTI CFS-S ACR or equivalent)
- 4 Fire stop coating thickness 1 mm (e.g. HILTI CFS-CT, PROMASTOP-CC or equivalent)
- 5 Duct
- 6 Protective cladding boards - (not part of the damper) but must be used as part of the penetration filling. It can be ordered from MANDIK as an accessory (e.g. PROMATECT-MST - min. density 750 kg/m³ for AxB ≤ 500x400, th. 10 mm, for AxB > 500x400, th. 15 mm or equivalent)
- 7 Fire resistant mastic - fill the gap on both sides of the fire separation construction and around the perimeter of penetration and damper body. (e.g. HILTI CFS-S ACR)
- 8 Fixing profile with threaded rod

Wall build construction must be symmetrical and in accordance with BS EN 1363-1 and tested in accordance with BS EN 1364-1.


Blade overlaps must be accounted for to ensure blade operation is not compromised. For full blade overlap dimensions please see product TPM.

For this installation built in edge should not be used, the damper blade must be installed in the centreline of the wall when in the closed position. Built in edge can be used for walls min. 100mm thick.


FFDM Breakaway Joint should be used either side of the damper. See Product TPM for full duct connection details.

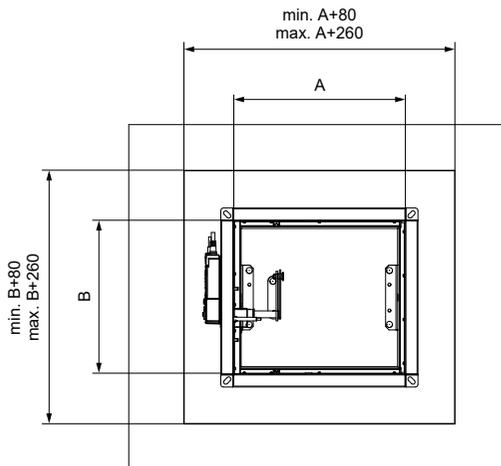

Drop rod and hanger location, please ensure that actuator operation is not compromised and ensure sufficient space to allow access hatch removal.



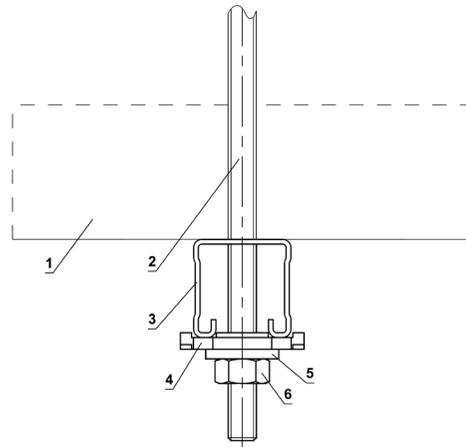


Drop rod and hanger position is not critical and can be positioned to suit the particular installation, applying symmetry where possible.

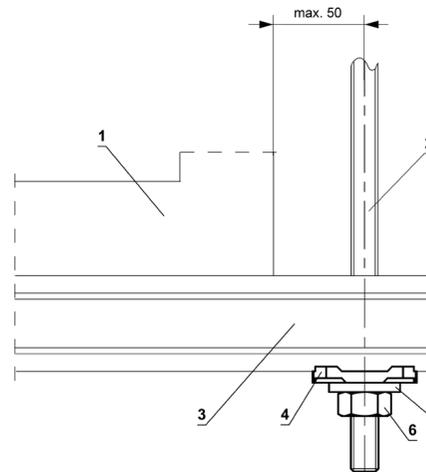

- Position:
- 1 FDMB
 - 2 Threaded rod M8 - M20
 - 3 Support HILTI (MQ-41 = <100kg) or (MQ-41/3 = >100kg)
 - 4 Bored plate HILTI MQZ-L
 - 5 Washer for M8 - M20
 - 6 Nut M8 - M20

Advice provided by a fixing specialist contractor takes precedence.

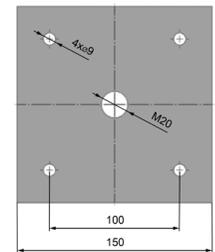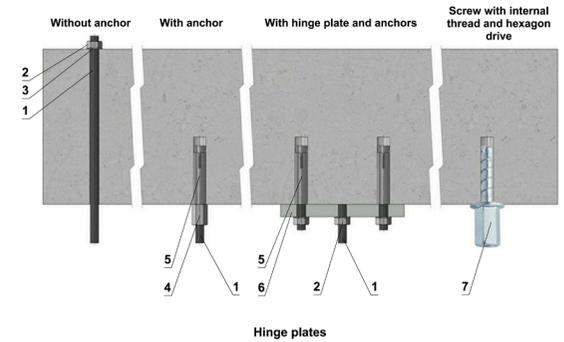

Screw with internal thread and hexagon drive



Load capacities of threaded hanger rods F [N] at the required fire resistance 90 minutes

Size	As [mm]	Weight G [kg]	
		for 1 piece	for 1 pair
M8	36.6	22	44
M10	58	35	70
M12	84.3	52	104
M14	115	70	140
M16	157	96	192
M18	192	117	234
M20	245	150	300

Position:

- 1 Threaded rod M8 - M20
- 2 Nut
- 3 Washer
- 4 Coupling nut
- 5 Anchor
- 6 Hinge plate - min. thickness 10mm
- 7 Concrete screw tested for fire resistance R30-R90, max. tension up to 0.75KN (length 35mm)

Drop rod diameter is based on damper weight, see full Damper TPM for further technical details or contact help@Mandik.co.uk. Mandik reserves the right to update this information without prior notice.

		Mandik UK Ltd www.mandik.co.uk Office: 0117 4526376	130 Aztec West Park Avenue Bristol BS32 4UB
		Title: FDMB Lightweight Wall - Firebatt	
Classification: EI 30 (ve i<->) S		UKCA certified acc. to EN 15650 Tested in accordance with EN 1366-2	
Drawing No: 0000-0000-123 Rev 3		Size: (min-max) 100x100 - 1000x500 up to 0.5m2 Date: 03/07/2023	Illustrated: AA Approved: MF
Intellectual property of MANDIK Ltd. Unauthorised use shall be punishable by law			